

PG Concrete Power Trowels



Power Trowels from Weber MT are the optimum solution for efficient concrete finishing by machine. They combine excellent performance with high efficiency and deliver smooth surfaces in less time.

Find always the right machine for your job site: we provide a choice of three working diameters for a high versatility in use, for example the PG 55 with a width of 60 cm. Although this machine has been specially designed for floor screed works in small premises and narrow corridors, it is also ideally suited for a wide range of other applications. All machines are available in two versions. Use machines with gasoline engine for outdoor applications. For indoor work, machines with electric motor are the right choice.



PG 55



PG 70 E




Advantages / Accessories

- ▶ High operating comfort due to elastic trowel blade mechanism. It reduces vibrations and ensures easy operation.
- ▶ Guide bar infinitely variable for optimum adaptation to the operator's height. Place-saving design because guide bar folds upwards for transport.
- ▶ Lifting bracket facilitates transport and protect the drive unit (PG 70 and PG 90).
- ▶ No accidents at work caused by machines spinning out of control. A "deadman control" stops the engine/motor in time.
- ▶ A comprehensive range of accessories, such as grinding plates, steel wire brushes and milling plates, makes the PG 55 a universal machine also for grinding and cleaning applications.

Technical data

Type	Working diameter	Operating weight	Rotation speed	Engine type, manufacturer	Engine output
PG 55 BF	565 mm	53 kg	60-115 r.p.m.	4-stroke gasoline, Subaru EX 17	4.2 kW (5.7 PS)
PG 55 EF	565 mm	48 kg	100 r.p.m.	Elektro, 230 V	1.5 kW
PG 70	750 mm	74 kg	60-120 r.p.m.	4-stroke gasoline, Subaru EX 17	4.2 kW (5.7 PS)
PG 70 E	750 mm	76 kg	95 r.p.m.	Elektro, 400 V	2.2 kW
PG 90	900 mm	78 kg	60-120 r.p.m.	4-stroke gasoline, Subaru EX 17	4.2 kW (5.7 PS)
PG 90 E	900 mm	87 kg	95 r.p.m.	Elektro, 400 V	3.0 kW

We reserve the right to alter specifications.

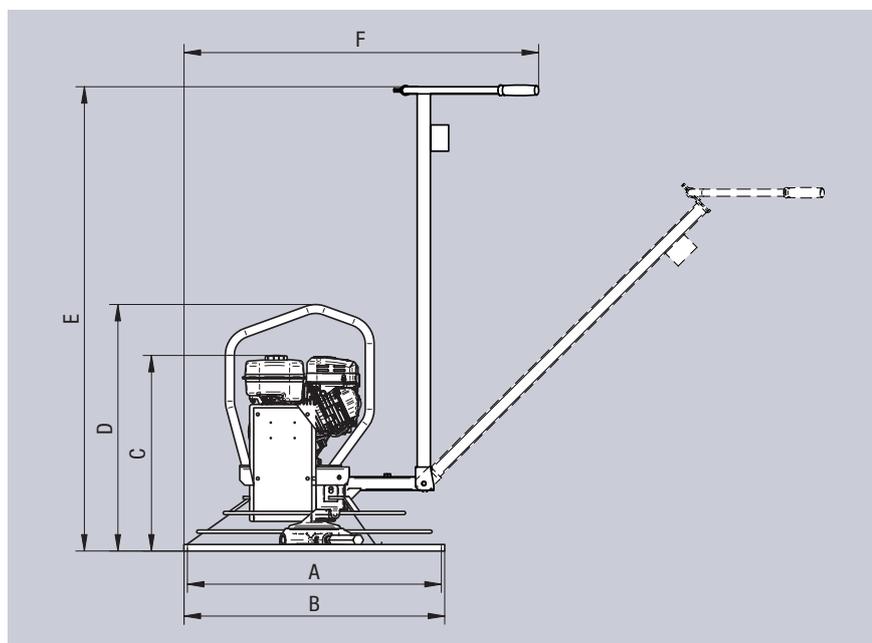

Type	A	B	C	D	E	F
PG 55 BF	565 mm	595 mm	620 mm	/	1275 mm	665 mm
PG 55 EF	565 mm	595 mm	500 mm	/	1275 mm	665 mm
PG 70	750 mm	786 mm	/	780 mm	1430 mm	970 mm
PG 70 E	750 mm	786 mm	/	660 mm	1430 mm	970 mm
PG 90	900 mm	946 mm	/	780 mm	1430 mm	1050 mm
PG 90 E	900 mm	946 mm	/	660 mm	1430 mm	1050 mm

We reserve the right to alter specifications.